


Made in Italy

 **Esem 3.0, code: ES30105MBD**
Recessed for indoor applications

17/07/2024 Rev. 31




 on request
 
 kg 0,25
  Ø50 mm
 IP40
 DALI
 PUSH
 

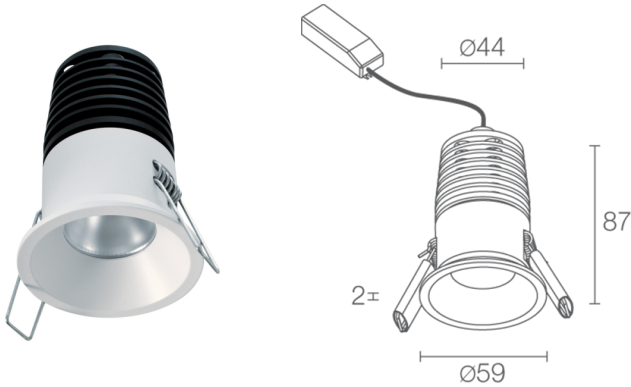

DESCRIPTION

recessed downlight for indoor applications; recessed (ceiling); Power consumption: 8W; Power supply: 230Vac; Lumen output at source: 512 lm (3000K); Delivered lumen output: 425 lm (3000K, 30°); 1 multichip power LED, 2-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 30°; CRI Colour Rendering Index: 80; Body material: body and trim in aluminium; Finishes: white (RAL 9003); RAL finish on request; Thickness of installation surface: min 5 mm, max 25 mm; power supply unit included; includes 0.30 m cable; Control system: PUSH, DALI; Ingress protection: IP40; Casambi-compatible version, controllable with the Casambi app, available on request; Operating temperature: 0°C – +45°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class I; Weight: 250 g; Dimensions: Ø59x87 mm; Cutout dimensions: Ø50 mm; Volume of thermal heatsink: Ø170x150 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

ELECTRICAL CHARACTERISTICS

Power consumption	8W
Power supply	230Vac
Power supply unit	power supply unit included
Control system	PUSH, DALI

LIGHTING CHARACTERISTICS

Number and type of LED	1 multichip power LED
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	80
Binning	2-step MacAdam
Optics	30°
Lumen output at source	512 lm (3000K)
Delivered lumen output	425 lm (3000K, 30°)

MECHANICAL CHARACTERISTICS


Dimensions	Ø59x87 mm
Weight	250 g
Finishes	white RAL 9003
Mounting	with fixing springs
Body material	body and trim in aluminium
Cutout dimensions	Ø50 mm
Volume of thermal heatsink	Ø170x150 mm

GENERAL CHARACTERISTICS

Ingress protection	IP40
Operating temperature	0°C — +45°C
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Appliance class	class I
Walkover	no
Drive-over	no
Power cables	includes 0.30 m cable
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	Casambi-compatible version, controllable with the Casambi app, available on request

PHOTOMETRIC DATA

M - 30°

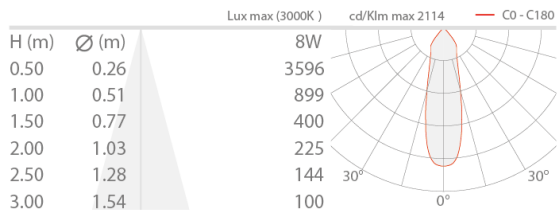

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.