


Made in Italy



**Stinger 2.0, code: BASGR20101050JB**  
Projectors for indoor applications



01/04/2025 Rev. 01/2022



## DESCRIPTION

projector for indoor applications; on track; Power consumption: 20W; Power supply: 230Vac; Lumen output at source: 2600 lm (3000K); Delivered lumen output: 1701 lm (3000K, 38°); 1 COB LED, 3-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 60°; CRI Colour Rendering Index: >90; Body material: body in anodized aluminium; Finishes: white (RAL 9003); Screen material: glass screen; built-in power supply unit; Ingress protection: IP20; DALI version available on request; version with CRI >97 available on request; version with LED colour 2700K available on request; Operating temperature: 35°C; Glow wire test: 650°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Weight: 850 g; Dimensions: Ø90x165mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: BE0017001 Suspension kit with 2 m cable and clutch adjustment, BE0020011 Lighting track 3-CCT aluminium 1000 mm - white, BE0020021 Lighting track 3-CCT aluminium 2000 mm - white, BE0020031 Lighting track 3-CCT aluminium 3000 mm - white, BE0021001 Supply connector earth conductor on left - white, BE0021011 Supply connector earth conductor on right - white, BE0021101 Concealed coupling with wiring - white, BE0021201 End cap - white, BE0021301 L-shaped coupling ground external - white, BE0021311 L-shaped coupling ground internal - white, BE0021401 Flexible coupling - white, BE0022001 Cover - length 1000 mm - white, BE0026111 3-phase ceiling monopoint - white, BE0030011 Lighting track 3-CCT aluminium 1000 mm - black, BE0030021 Lighting track 3-CCT aluminium 2000 mm - black, BE0030031 Lighting track 3-CCT aluminium 3000 mm - black, BE0031001 Supply connector earth conductor on left - black, BE0031011 Supply connector earth conductor on right - black, BE0031101 Concealed coupling with wiring - black, BE0031201 End cap - black, BE0031301 L-shaped coupling ground external - black, BE0031311 L-shaped coupling ground internal - black, BE0031401 Flexible coupling - black, BE0032001 Cover - length 1000 mm - black, BE0036111 3-phase ceiling monopoint - black, WBA05N Asymmetrical snoot - black, WBA06N Barn doors - black, WBA07N Standard snoot - black, WHA01 Honeycomb louvre, WRA01 Optics - 15°, WRA04 Optics - 24°, WRA07 Optics - 38°, WRA09 Optics - 60°; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Product being discontinued

### ELECTRICAL CHARACTERISTICS

Power consumption	20W
Power supply	230Vac
Power supply unit	built-in power supply unit

### LIGHTING CHARACTERISTICS

Number and type of LED	1 COB LED
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	>90
Binning	3-step MacAdam
Optics	60°
Lumen output at source	2600 lm (3000K)
Delivered lumen output	1701 lm (3000K, 38°)

### MECHANICAL CHARACTERISTICS


Dimensions	Ø90x165mm
Weight	850 g
Finishes	white RAL 9003
Body material	body in anodized aluminium
Screen material	glass screen

### GENERAL CHARACTERISTICS

Ingress protection	IP20
Operating temperature	35°C
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	650°C
Walkover	no
Drive-over	no
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	DALI version available on request; version with CRI >97 available on request; version with LED colour 2700K available on request

PHOTOMETRIC DATA

J - 60°

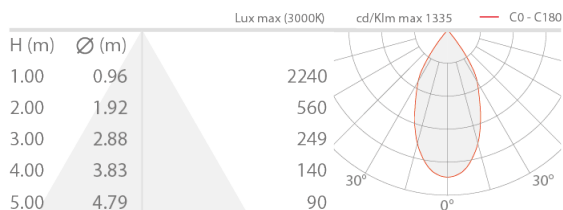

ACCESSORIES

Anti-glare




**WBA05N**  
Asymmetrical snoot - black



**WBA06N**  
Barn doors - black




**WBA07N**  
Standard snoot - black




**WHA01**  
Honeycomb louvre


Other




**BE0017001**  
Suspension kit with 2 m cable and clutch adjustment




**BE0020011**  
Lighting track 3-CCT aluminium 1000 mm - white



**BE0020021**  
Lighting track 3-CCT aluminium 2000 mm - white




**BE0020031**  
Lighting track 3-CCT aluminium 3000 mm - white




**BE0021001**

Supply connector earth conductor on left - white




**BE0021011**

Supply connector earth conductor on right - white




**BE0021101**

Concealed coupling with wiring - white




**BE0021201**

End cap - white




**BE0021301**

L-shaped coupling ground external - white




**BE0021311**

L-shaped coupling ground internal - white




**BE0021401**

Flexible coupling - white




**BE0022001**

Cover - length 1000 mm - white




**BE0026111**

3-phase ceiling monopoint - white




**BE0030011**

Lighting track 3-CCT aluminium 1000 mm - black




**BE0030021**

Lighting track 3-CCT aluminium 2000 mm - black




**BE0030031**


Lighting track 3-CCT aluminium 3000 mm - black




**BE0031001**  
Supply connector earth conductor on left - black




**BE0031011**  
Supply connector earth conductor on right - black




**BE0031101**  
Concealed coupling with wiring - black




**BE0031201**  
End cap - black




**BE0031301**  
L-shaped coupling ground external - black




**BE0031311**  
L-shaped coupling ground internal - black



**BE0031401**  
Flexible coupling - black



**BE0032001**  
Cover - length 1000 mm - black



**BE0036111**  
3-phase ceiling monopoint - black



**WRA01**  
Optics - 15°



**WRA04**



**WRA07**

Optics - 24°

Optics - 38°



WRA09

Optics - 60°

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.