












Made in Italy

 **Updown 3.6, code: UD36005SA**
Wall mounted for outdoor applications

31/01/2025 Rev. 08/2024

 kg 0,34
 



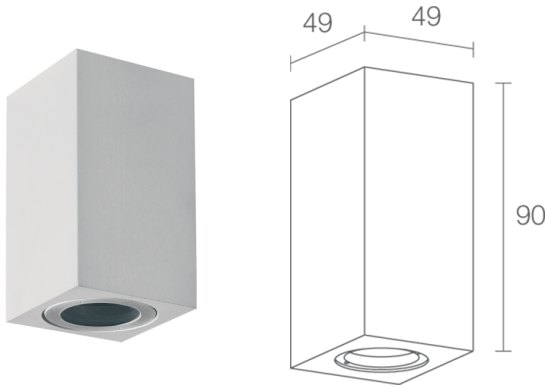


DESCRIPTION

wall mounted for outdoor applications, single beam; surface mounted (wall); Power consumption: 6W; Power supply: 24Vdc; Lumen output at source: 436 lm (3000K); Delivered lumen output: 239 lm (3000K, 22°); 3 power LEDs, 1/4 ANSI BIN, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 15°; CRI Colour Rendering Index: 80; Body material: body in anodized aluminium; Finishes: anodized grey; RAL finish on request; Screen material: screen in transparent extra-clear glass; power supply unit not included; includes 0.30 m PVC cable FROR 2x0.35 Ø3.5 mm; Ingress protection: IP65; Impact resistance: IK08; spacer with RAL finish available on request; spacer with RAL finish available on request; Casambi control using the Casambi app with dedicated electronics; Operating temperature: -20°C — +45°C; Glow wire test: 960°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class III; Weight: 340 g; Dimensions: 49x49x90 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: WD0100 Spacer - anodized grey; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Product being discontinued

ELECTRICAL CHARACTERISTICS

Power consumption	6W
Power supply	24Vdc
Power supply unit	power supply unit not included

LIGHTING CHARACTERISTICS

Number and type of LED	3 power LEDs
Average LED life	50 000h L90 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	80
Binning	1/4 ANSI BIN
Optics	15°
Lumen output at source	436 lm (3000K)
Delivered lumen output	239 lm (3000K, 22°)

MECHANICAL CHARACTERISTICS


Dimensions	49x49x90 mm
Weight	340 g
Finishes	anodized grey
Mounting	with screws and plugs
Body material	body in anodized aluminium
Screen material	screen in transparent extra-clear glass

GENERAL CHARACTERISTICS

Ingress protection	IP65
Operating temperature	-20°C — +45°C
Impact resistance	IK08
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Glow wire test	960°C
Appliance class	class III
Walkover	no
Drive-over	no
Power cables	includes 0.30 m PVC cable FROR 2x0.35 Ø3.5 mm
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	spacer with RAL finish available on request; spacer with RAL finish available on request; Casambi control using the Casambi app with dedicated electronics


PHOTOMETRIC DATA

S - 15°

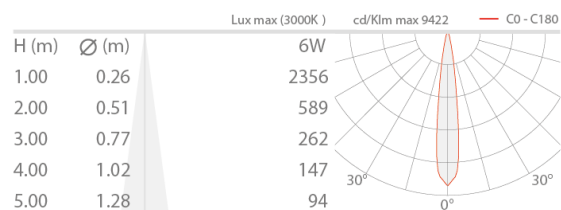

ACCESSORIES

Installation Accessories



WD0100

Spacer - anodized grey

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.