


Made in Italy


 **Kora 3.0, code: KR30105MB**  
Suspended for indoor applications

21/11/2024 Rev. 30






 kg 1,60
 
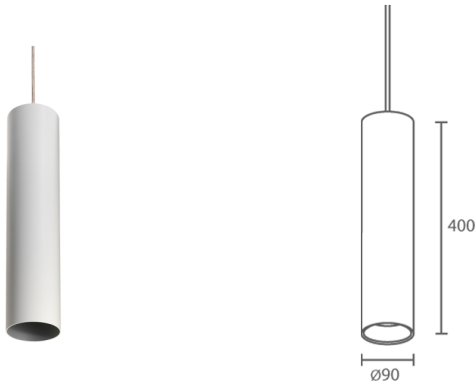
## DESCRIPTION

suspended for indoor applications; surface mounted (ceiling) with ceiling rose; Power consumption: 21W; Power supply: 230Vac; Lumen output at source: 1870 lm (3000K); Delivered lumen output: 1289 lm (3000K, 38°); 1 multichip power LED, 3-step MacAdam, 50 000h L80 B10 (Ta 25°C); LED colour: 3000K; Optics: 38°; CRI Colour Rendering Index: 80; Body material: body in anticorodal aluminium, ceiling rose in steel; Finishes: white (RAL 9003); RAL finish on request; Screen material: screen in plexiglass; built-in power supply unit; includes 2.50 m PVC cable, FROR 2x0.75 Ø5.4 mm; Ingress protection: IP40; DALI and 0/1-10V versions available on request, Casambi-compatible version, controllable with the Casambi app, available on request; Design by: Cibicworkshop; Operating temperature: 0°C — +45°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class II; Weight: 1600 g; Dimensions: Ø90x400 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Available

### ELECTRICAL CHARACTERISTICS

Power consumption	21W
Power supply	230Vac
Power supply unit	built-in power supply unit

### LIGHTING CHARACTERISTICS

Number and type of LED	1 multichip power LED
Average LED life	50 000h L80 B10 (Ta 25°C)
LED colour	3000K
CRI Colour Rendering Index	80
Binning	3-step MacAdam
Optics	38°
Lumen output at source	1870 lm (3000K)
Delivered lumen output	1289 lm (3000K, 38°)

### MECHANICAL CHARACTERISTICS


Dimensions	Ø90x400 mm
Weight	1600 g
Finishes	white RAL 9003
Mounting	with ceiling rose
Body material	body in anticorodal aluminium, ceiling rose in steel
Screen material	screen in plexiglass

### GENERAL CHARACTERISTICS

Ingress protection	IP40
Operating temperature	0°C — +45°C
Energy efficiency class	F (light source) in accordance with EU 2019/2015
Appliance class	class II
Walkover	no
Drive-over	no
Power cables	includes 2.50 m PVC cable, FROR 2x0.75 Ø5.4 mm
Photobiological safety	photobiological safety: risk group 1 according to EN 62471:2006
Notes	DALI and 0/1-10V versions available on request, Casambi-compatible version, controllable with the Casambi app, available on request

PHOTOMETRIC DATA

M - 38°

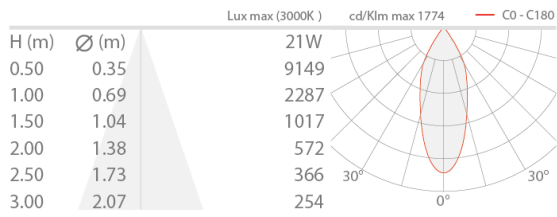

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.