



Made in Italy

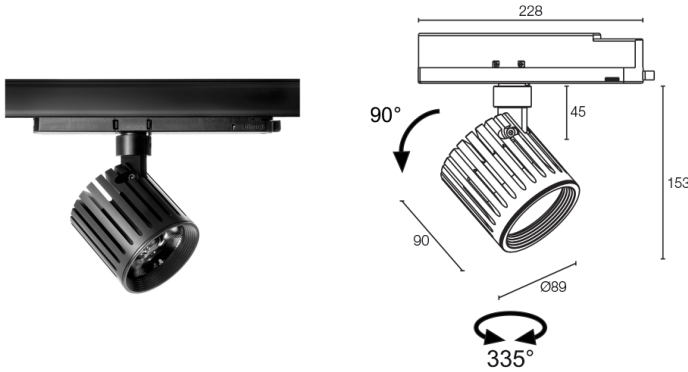

**Zab Track 1.0, code: ZT101015SN**  
Projectors for indoor applications

21/11/2024 Rev. 32



## DESCRIPTION

projector for indoor applications; on horizontal track; Power consumption: 23W; Power supply: 230Vac; Lumen output at source: 1912 lm (3000K); Delivered lumen output: 1366 lm (3000K, 32°); 1 COB LED Xicato Xtm Artist Series®, 2-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 3000K; Optics: 20°: optical system consisting of a high-efficiency TIR lens; CRI Colour Rendering Index: 98; Body material: body and screw ring made of extruded anodized aluminium, produced entirely on a CNC lathe; Finishes: body and ring anodized glossy black (RAL 9005); RAL finish on request; built-in power supply unit; Ingress protection: IP40; CRI 98 (R9>98); IES TM-30 Colour Fidelity (Rf) 96, Colour Gamut (Rg) 103, Casambi-compatible version, controllable with the Casambi app, available on request; Eurostandard adaptor; Operating temperature: 0°C — +45°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class I; Weight: 900 g; Dimensions: Ø89x93 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: BE0017001 Suspension kit with 2 m cable and clutch adjustment, BE0030011 Lighting track 3-CCT aluminium 1000 mm - black, BE0030021 Lighting track 3-CCT aluminium 2000 mm - black, BE0030031 Lighting track 3-CCT aluminium 3000 mm - black, BE0031001 Supply connector earth conductor on left - black, BE0031011 Supply connector earth conductor on right - black, BE0031101 Concealed coupling with wiring - black, BE0031201 End cap - black, BE0031301 L-shaped coupling ground external - black, BE0031311 L-shaped coupling ground internal - black, BE0031401 Flexible coupling - black, BE0032001 Cover - length 1000 mm - black, WB0401N Standard snoot - black, WB0402N Asymmetrical snoot - black, WB0403N Barn doors - black, WH0710 Honeycomb louvre ; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Product being discontinued

### ELECTRICAL CHARACTERISTICS

|                   |                            |
|-------------------|----------------------------|
| Power consumption | 23W                        |
| Power supply      | 230Vac                     |
| Power supply unit | built-in power supply unit |

### LIGHTING CHARACTERISTICS

|                            |                                     |
|----------------------------|-------------------------------------|
| Number and type of LED     | 1 COB LED Xicato Xtm Artist Series® |
| Average LED life           | 50 000h L90 B10 (Ta 25°C)           |
| LED colour                 | 3000K                               |
| CRI Colour Rendering Index | 98                                  |
| Binning                    | 2-step MacAdam                      |
| Optics                     | 20°                                 |
| Lumen output at source     | 1912 lm (3000K)                     |
| Delivered lumen output     | 1366 lm (3000K, 32°)                |

### MECHANICAL CHARACTERISTICS


|               |                            |
|---------------|----------------------------|
| Dimensions    | Ø89x93 mm                  |
| Weight        | 900 g                      |
| Finishes      | black RAL 9005             |
| Mounting      | with Eurostandard adaptor  |
| Body material | body in anodized aluminium |

### GENERAL CHARACTERISTICS

|                         |   |
|-------------------------|---|
| Ingress protection      | IP40  |
| Operating temperature   | 0°C — +45°C   |
| Features                | CRI 98 (R9>98)  |
| Energy efficiency class | F (light source) in accordance with EU 2019/2015  |
| Appliance class         | class I   |
| Walkover                | no  |
| Drive-over              | no  |
| Photobiological safety  | photobiological safety: risk group 1 according to EN 62471:2006   |
| Notes                   | IES TM-30 Colour Fidelity (Rf) 96, Colour Gamut (Rg) 103, Casambi-compatible version, controllable with the Casambi app, available on request; Eurostandard adaptor |

PHOTOMETRIC DATA

S - 20°

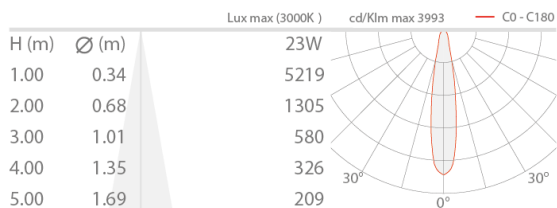

ACCESSORIES

Anti-glare



WB0401N  
Standard snoot - black



WB0402N  
Asymmetrical snoot - black




WB0403N  
Barn doors - black




WH0710  
Honeycomb louvre  
built into the lighting fixture  
Order together with the lighting fixture


Other




BE0017001  
Suspension kit with 2 m cable and clutch adjustment




BE003001  
Lighting track 3-CCT aluminium 1000 mm - black



BE003002  
Lighting track 3-CCT aluminium 2000 mm - black




BE003003  
Lighting track 3-CCT aluminium 3000 mm - black




**BE0031001**

Supply connector earth conductor on left - black




**BE0031011**

Supply connector earth conductor on right - black




**BE0031101**

Concealed coupling with wiring - black




**BE0031201**

End cap - black




**BE0031301**

L-shaped coupling ground external - black




**BE0031311**

L-shaped coupling ground internal - black



**BE0031401**

Flexible coupling - black



**BE0032001**

Cover - length 1000 mm - black

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.