
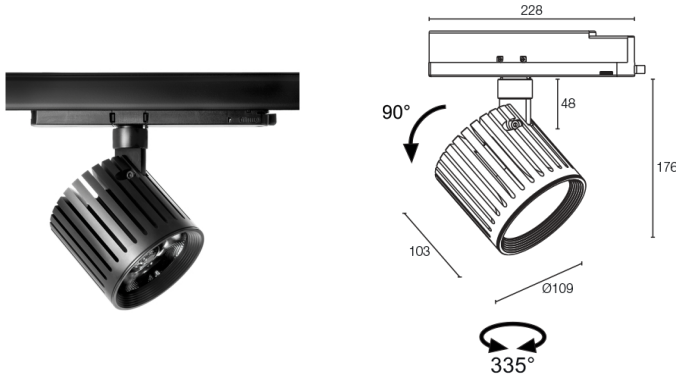



Made in Italy

 **Zab Track 3.0, code: ZT301019LN**
Projectors for indoor applications

21/11/2024 Rev. 32



DESCRIPTION

projector for indoor applications; on horizontal track; Power consumption: 34W; Power supply: 230Vac; Lumen output at source: 2505 lm (3000K); Delivered lumen output: 1785 lm (3000K, 25°); 1 COB LED Xicato Xtm Artist Series®, 2-step MacAdam, 50 000h L90 B10 (Ta 25°C); LED colour: 4000K; Optics: 42°: optical system consisting of a high-efficiency TIR lens; CRI Colour Rendering Index: 98; Body material: body and screw ring made of extruded anodized aluminium, produced entirely on a CNC lathe; Finishes: body and ring anodized glossy black (RAL 9005); RAL finish on request; built-in power supply unit; Ingress protection: IP40; CRI 98 (R9>98); IES TM-30 Colour Fidelity (Rf) 96, Colour Gamut (Rg) 103, Casambi-compatible version, controllable with the Casambi app, available on request; Eurostandard adaptor; Operating temperature: 0°C — +45°C; Photobiological safety: photobiological safety: risk group 1 according to EN 62471:2006; Appliance class: class I; Weight: 1250 g; Dimensions: Ø109x105 mm; Energy efficiency class: F (light source) in accordance with EU 2019/2015; Accessories: BE0017001 Suspension kit with 2 m cable and clutch adjustment, BE0030011 Lighting track 3-CCT aluminium 1000 mm - black, BE0030021 Lighting track 3-CCT aluminium 2000 mm - black, BE0030031 Lighting track 3-CCT aluminium 3000 mm - black, BE0031001 Supply connector earth conductor on left - black, BE0031011 Supply connector earth conductor on right - black, BE0031101 Concealed coupling with wiring - black, BE0031201 End cap - black, BE0031301 L-shaped coupling ground external - black, BE0031311 L-shaped coupling ground internal - black, BE0031401 Flexible coupling - black, BE0032001 Cover - length 1000 mm - black, WB0404N Standard snoot - black, WB0405N Asymmetrical snoot - black, WB0406N Barn doors - black, WH0711 Honeycomb louvre ; tested and approved via E.O.L. (End Of Line) test with functioning test and check of electrical power consumption

Status: Product being discontinued

ELECTRICAL CHARACTERISTICS

| | |
|-------------------|----------------------------|
| Power consumption | 34W |
| Power supply | 230Vac |
| Power supply unit | built-in power supply unit |

LIGHTING CHARACTERISTICS

| | |
|----------------------------|-------------------------------------|
| Number and type of LED | 1 COB LED Xicato Xtm Artist Series® |
| Average LED life | 50 000h L90 B10 (Ta 25°C) |
| LED colour | 4000K |
| CRI Colour Rendering Index | 98 |
| Binning | 2-step MacAdam |
| Optics | 42° |
| Lumen output at source | 2505 lm (3000K) |
| Delivered lumen output | 1785 lm (3000K, 25°) |

MECHANICAL CHARACTERISTICS


| | |
|---------------|----------------------------|
| Dimensions | Ø109x105 mm |
| Weight | 1250 g |
| Finishes | black RAL 9005 |
| Mounting | with Eurostandard adaptor |
| Body material | body in anodized aluminium |

GENERAL CHARACTERISTICS

| | |
|-------------------------|---|
| Ingress protection | IP40 |
| Operating temperature | 0°C — +45°C |
| Features | CRI 98 (R9>98) |
| Energy efficiency class | F (light source) in accordance with EU 2019/2015 |
| Appliance class | class I |
| Walkover | no |
| Drive-over | no |
| Photobiological safety | photobiological safety: risk group 1 according to EN 62471:2006 |
| Notes | IES TM-30 Colour Fidelity (Rf) 96, Colour Gamut (Rg) 103, Casambi-compatible version, controllable with the Casambi app, available on request; Eurostandard adaptor |

PHOTOMETRIC DATA

L - 42°

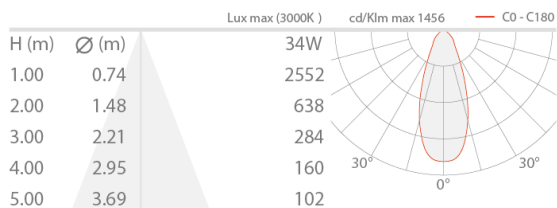

ACCESSORIES

Anti-glare




WB0404N
Standard snoot - black



WB0405N
Asymmetrical snoot - black




WB0406N
Barn doors - black




WH0711
Honeycomb louvre
built into the lighting fixture
Order together with the lighting fixture


Other




BE0017001
Suspension kit with 2 m cable and clutch adjustment




BE0030011
Lighting track 3-CCT aluminium 1000 mm - black



BE0030021
Lighting track 3-CCT aluminium 2000 mm - black




BE0030031
Lighting track 3-CCT aluminium 3000 mm - black




BE0031001

Supply connector earth conductor on left - black




BE0031011

Supply connector earth conductor on right - black




BE0031101

Concealed coupling with wiring - black




BE0031201

End cap - black




BE0031301

L-shaped coupling ground external - black




BE0031311

L-shaped coupling ground internal - black



BE0031401

Flexible coupling - black



BE0032001

Cover - length 1000 mm - black

L&L Luce&Light SRL reserves the right to change the information contained in this document at any time without prior notice being given.