


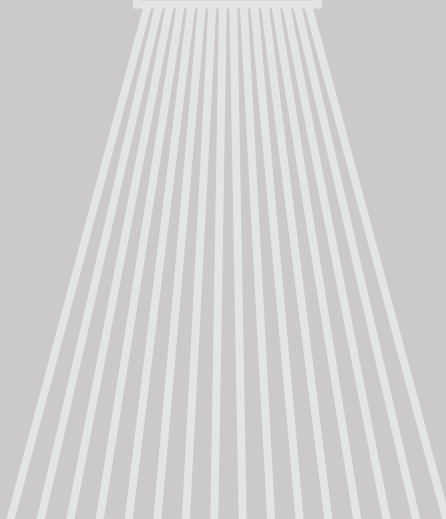



**INTONO**

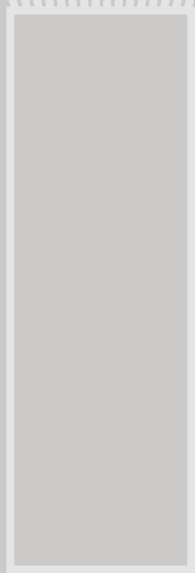


Luce & Light

# INTONO

VOICE-RESPONSIVE LIGHT AND SOUND,  
IN TUNE WITH ITS SURROUNDINGS

APPLIQUE DA ESTERNO / OUTDOOR WALL MOUNTED



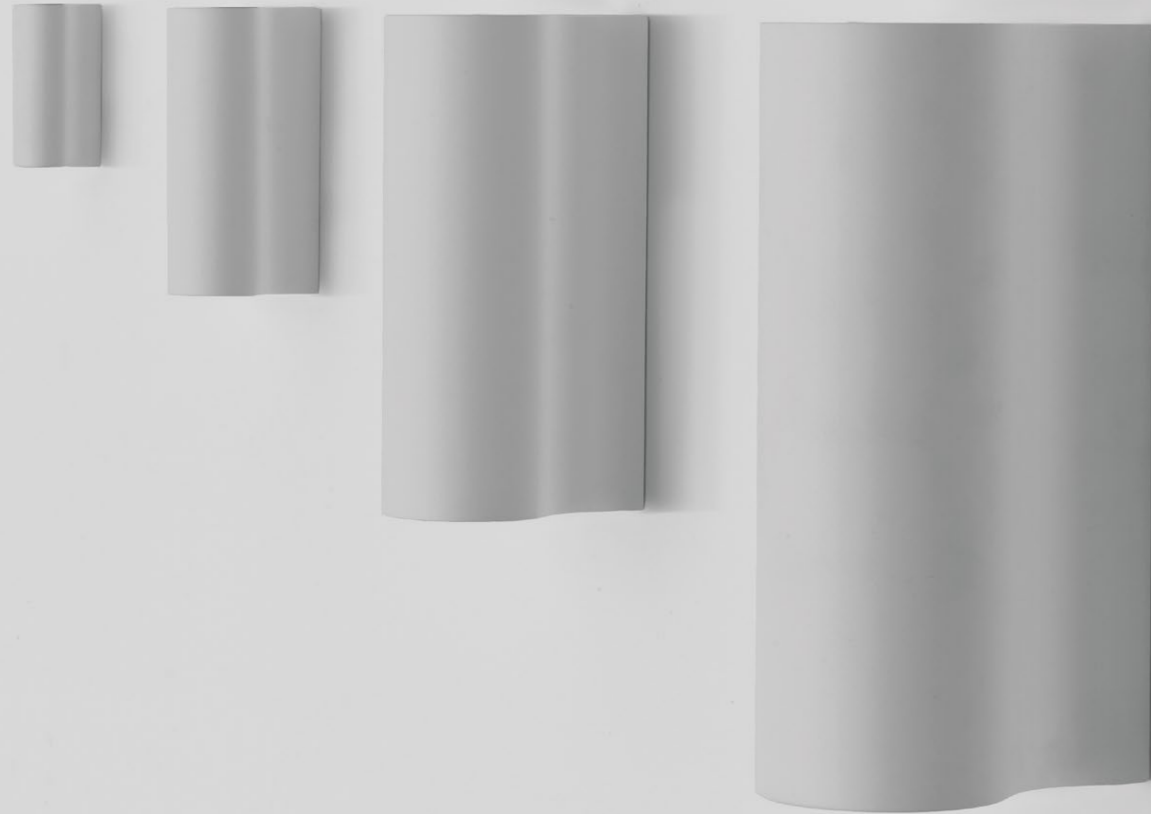

## INTONO

La nuova applique camaleontica che si uniforma alla parete. Il corpo della lampada è caratterizzato da uno snello cilindro raccordato al muro da una sinuosa doppia curva, in cui essenzialità ed eleganza sono i tratti dominanti. È una lampada adatta a installazioni in esterno su facciate, è mimetica, smart e sonora.

The new, chameleon-like wall-mounted fixture that blends in with the wall. The fixture's body, whose dominant traits are minimalism and elegance, is a slender cylinder connected to the wall by a sinuous double curve. Suitable for outdoor installation on facades, this lamp is smart, enabled for sound and blends in.



reddot winner 2020  
lighting design



2019  
WINNER  
LIGHTING  
DESIGN  
AWARDS



IDA  
DESIGN  
AWARDS  
GOLD  
WINNER  
2019

# INTONO

MIMETICA, SMART, SONORA / FINISH, SMART, SOUND

GRAZIE ALLA VERSIONE CON PRIMER, NEUTRO E AGGRAPPANTE, LA SUPERFICIE PUÒ ESSERE DIPINTA CON LA STESSA PITTURA DA MURO DELLA PARETE D'APPOGGIO, PER LASCIARE L'EMISSIONE LUMINOSA COME UNICA PROTAGONISTA.  
A VERSION COVERED IN A NEUTRAL BONDING PRIMER ALLOWS THE SURFACE TO BE PAINTED WITH THE SAME WALL PAINT AS THE WALL IT'S ATTACHED TO, FOCUSING ATTENTION ON THE LIGHT OUTPUT ALONE.

DIALOGA CON SMART SPEAKER COME GOOGLE HOME O AMAZON ECHO VIA WI-FI TRAMITE IL PROTOCOLLO ZIGBEE, CON VELOCI COMANDI VOCALI – SU RICHIESTA.  
COMMUNICATES WITH SMART SPEAKERS SUCH AS GOOGLE HOME OR AMAZON ECHO OVER WI-FI USING THE ZIGBEE PROTOCOL. WITH QUICK VOICE COMMANDS – AVAILABLE ON REQUEST.

PUÒ ALLOGGIARE UNA CASSA AUDIO PER RIPRODURRE LE TUE PLAYLIST DA SPOTIFY O AMAZON MUSIC.  
IT CAN ACCOMMODATE A SPEAKER TO PLAY YOUR PLAYLISTS FROM SPOTIFY OR AMAZON MUSIC.

FINISH


SMART

SOUND


# INTONO

DOMOTICA / HOME AUTOMATION

PLAYLIST LOUNGE  
IN SALA RISTORANTE  
CON LUCI AL 50%  
E PLAYLIST APERITIVO  
IN GIARDINO CON LUCI AL 100%.  
LOUNGE PLAYLIST IN THE  
RESTAURANT, WITH  
50% LIGHTS, AND APERITIF  
PLAYLIST IN THE GARDEN,  
WITH 100% LIGHTS.

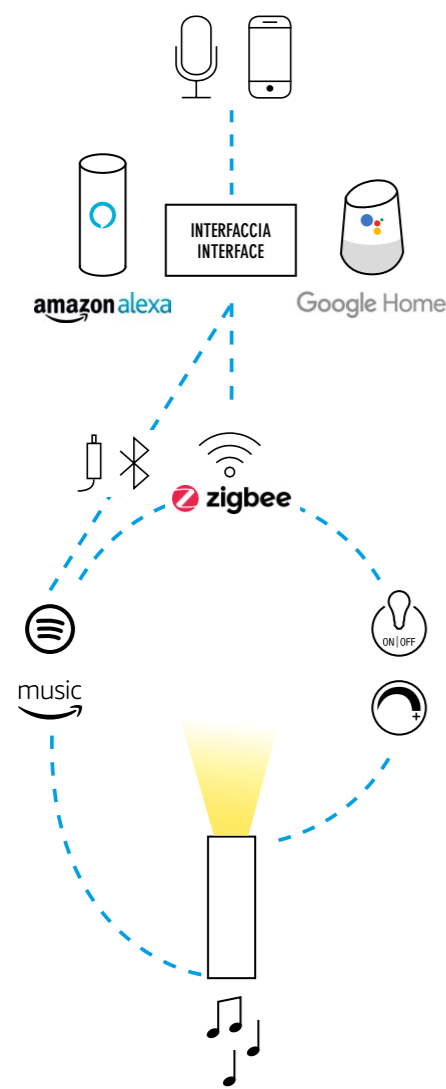

SU RICHIESTA VERSIONE COMPATIBILE CON GOOGLE HOME  
O AMAZON ECHO PER CONTROLLO TRAMITE COMANDI VOCALI  
VERSION COMPATIBLE WITH GOOGLE HOME OR AMAZON ECHO  
AVAILABLE ON REQUEST FOR VOICE COMMAND CONTROL

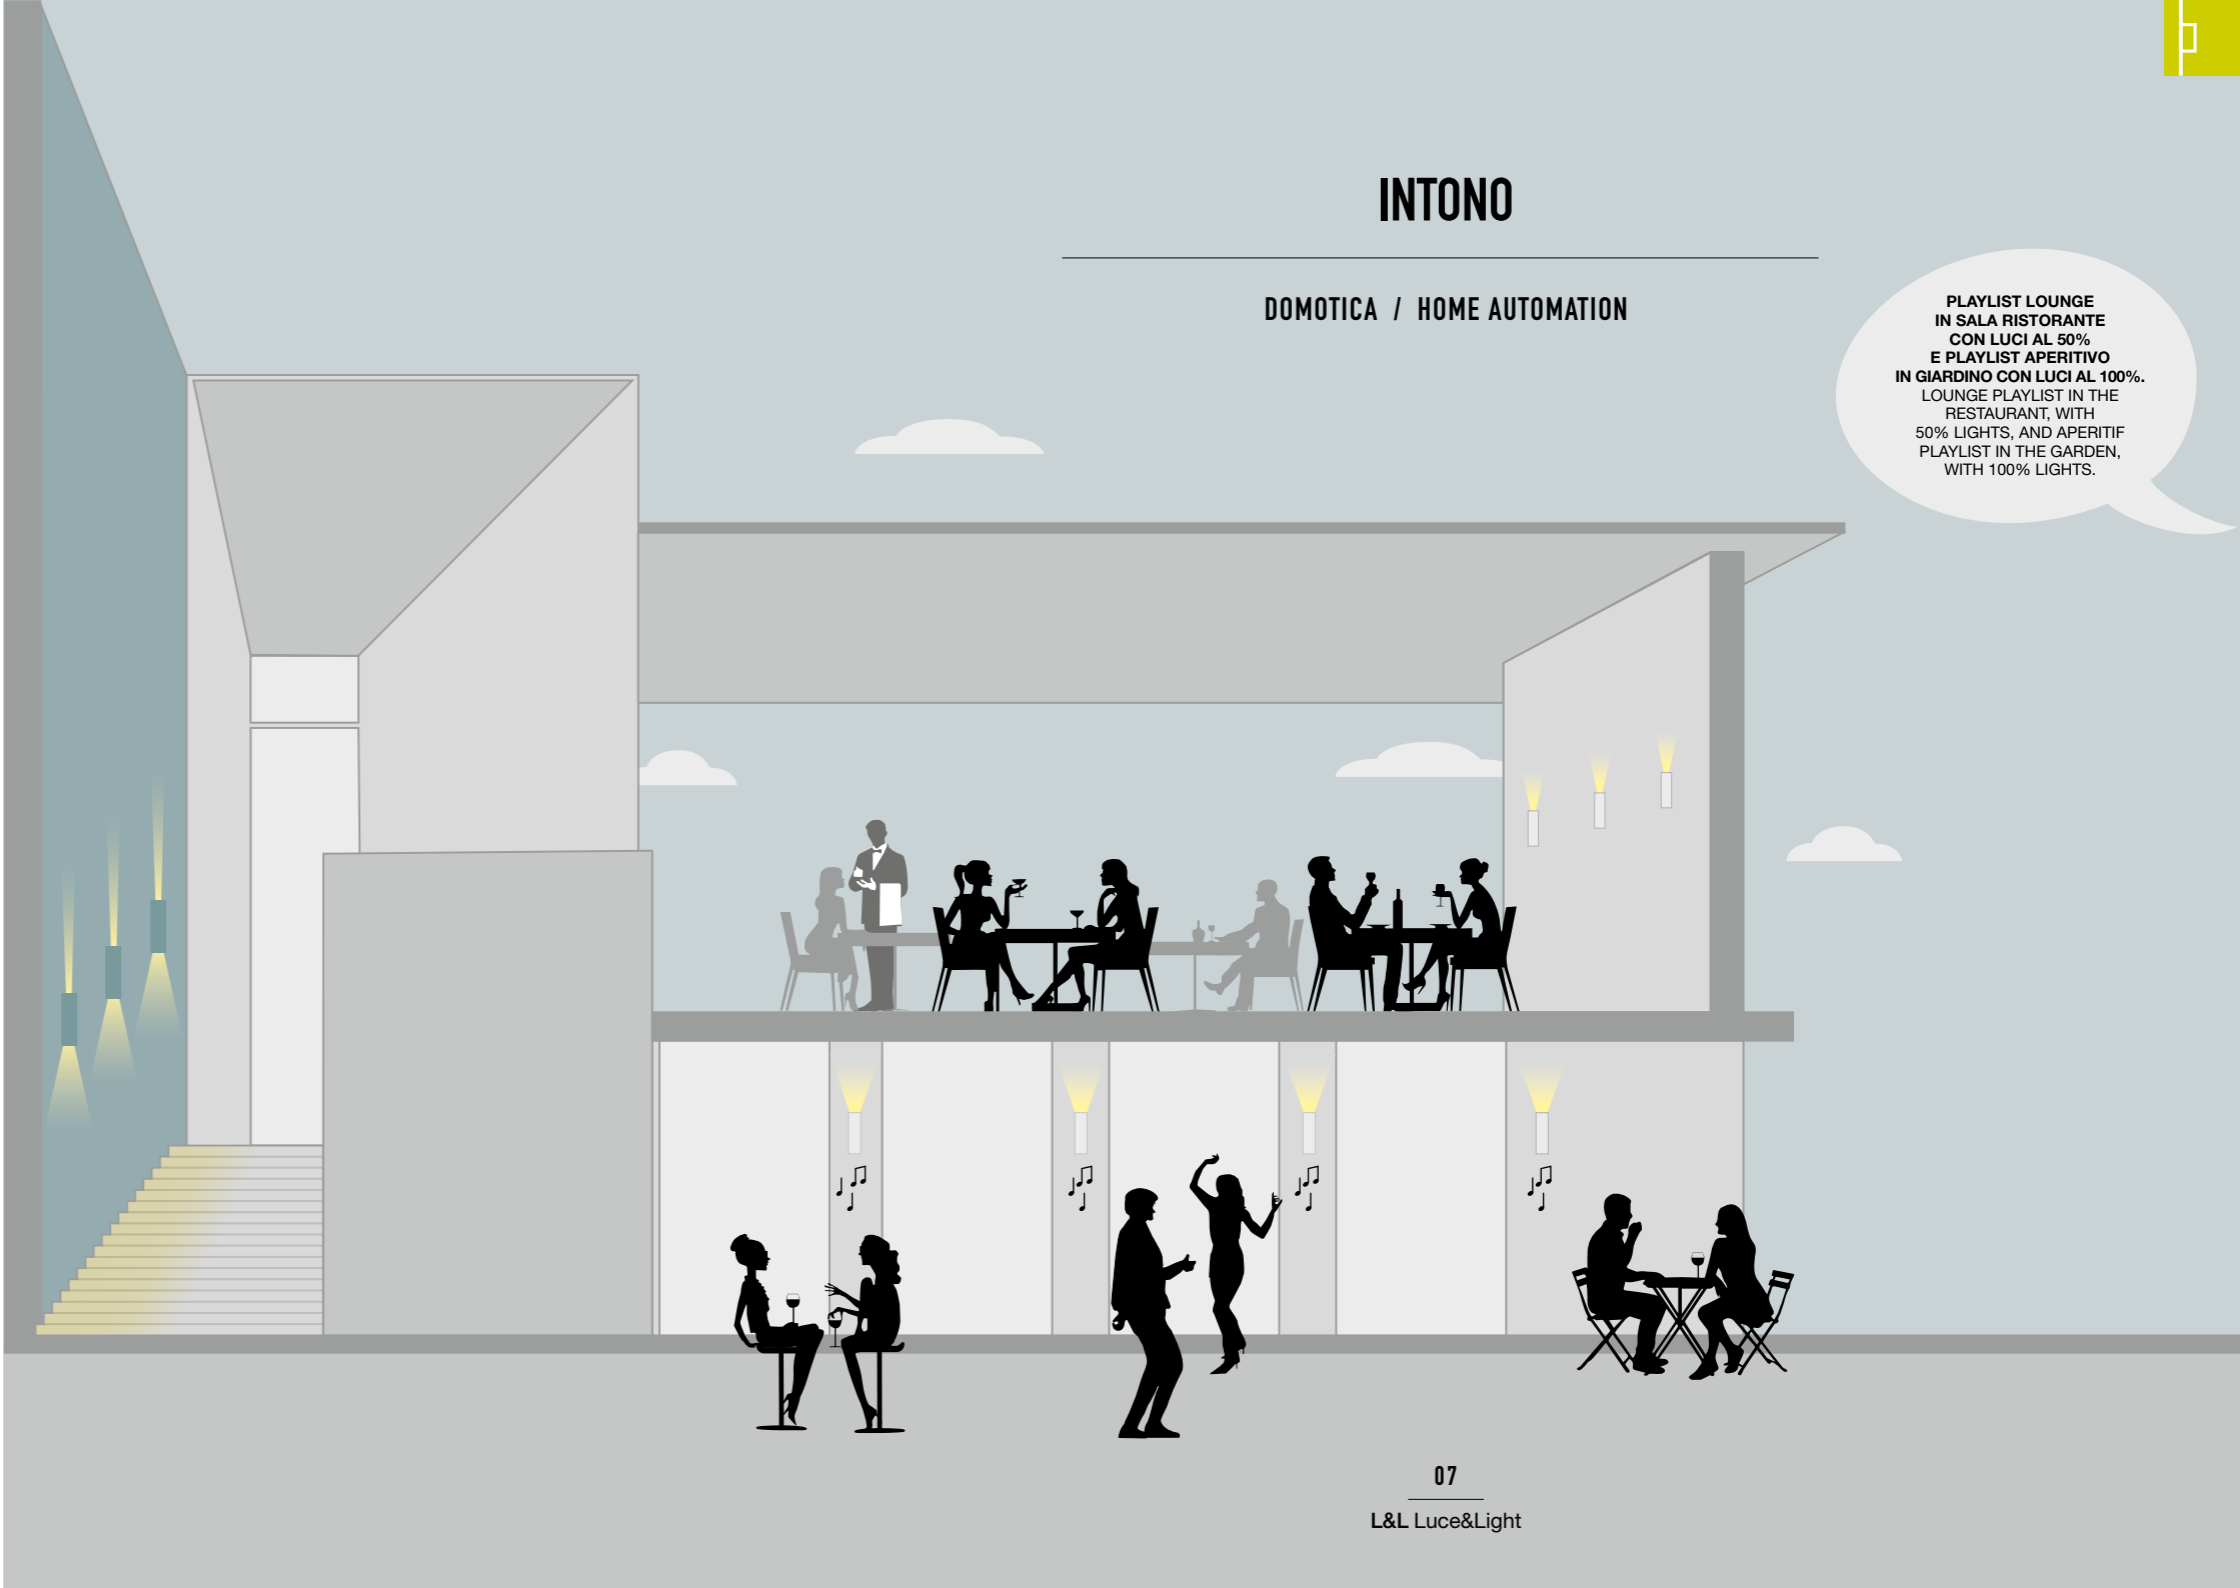



# INTONO

FINITURE / FINISHES



 <p>Bianco White</p>	 <p>Grigio Grey</p>
 <p>Antracite Anthracite</p>	 <p>Cor-ten</p>
 <p>Primer</p>	 <p>Finitura RAL su richiesta RAL finish on request</p>

# INTONO

## OTTICHE / OPTICS

INTONO NELLA VERSIONE BIEMISSIONE PUÒ AVERE QUESTE CONFIGURAZIONI OPPURE ULTERIORI COMBINAZIONI SU RICHIESTA. LE OTTICHE SONO ARRETRATE PER GARANTIRE UN ELEVATO COMFORT VISIVO. IN THE TWO-BEAM VERSION, INTONO CAN HAVE THESE CONFIGURATIONS, OR FURTHER ONES ON REQUEST. RECESSED OPTICS TO ENSURE HIGH VISUAL COMFORT.

### INTONO 3.2

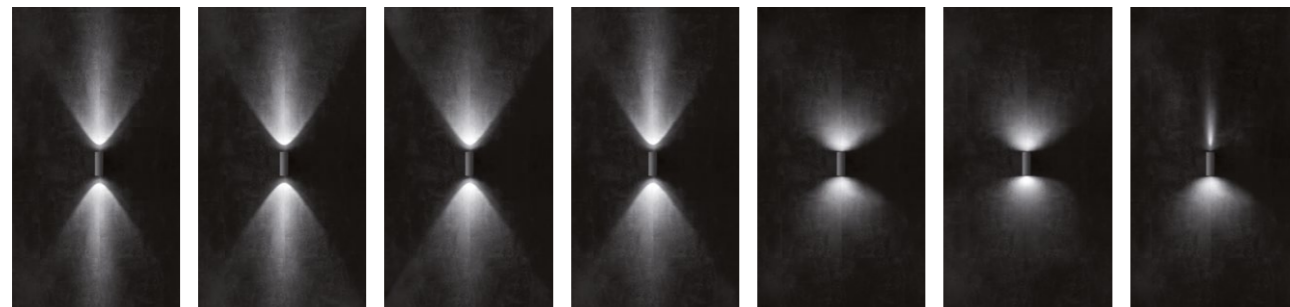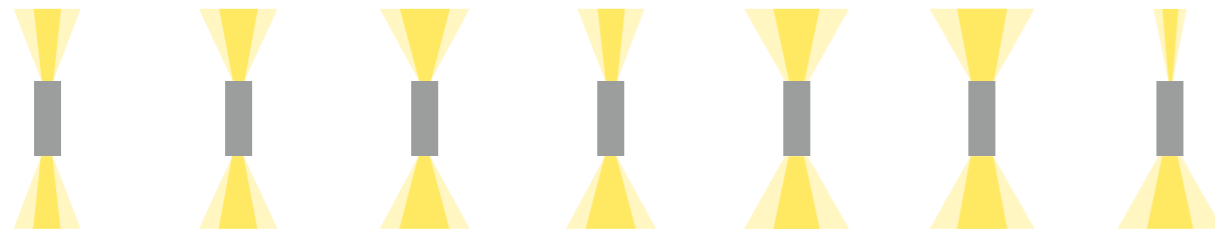

**SS** 15°+15°    **MM** 20°+20°    **LL** 43°+43°    **SL** 15°+43°    **WW** wall grazing + wall grazing    **WA** wall grazing + asimmetrica / asymmetrical    **ZW** asimmetrica / asymmetrical 11° + wall grazing



^  
**INTONO 3.1**  
3000K, 10W, asimmetrica / asymmetrical



# INTONO

APPLIQUE DA ESTERNO / OUTDOOR WALL MOUNTED




2700K 3000K 4000K

	<b>INTONO 1.1</b> 3W 24Vdc	<b>INTONO 2.1</b> 6W 230Vac	<b>INTONO 3.1</b> 10W 230Vac	<b>INTONO 4.1</b> 19W 230Vac
	<b>INTONO 1.2</b> 6W 24Vdc	<b>INTONO 2.2</b> 12W 230Vac	<b>INTONO 3.2</b> 20W 230Vac	<b>INTONO 4.2</b> 38W 230Vac
			<b>INTONO 3.9</b> 9W 24Vdc	<b>INTONO 4.9</b> 17W 24Vdc



## INTONO 1.1



### POTENZA / ALIMENTAZIONE POWER / POWER SUPPLY

3W 24Vdc

### CODICE CODE

NT1100 00 0 E Bianco / White  
 NT1100 00 0 F Grigio / Grey  
 NT1100 00 0 H Antracite / Anthracite  
 NT1100 00 0 T Cor-ten  
 NT1100 00 0 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>NIDO D'APE HONEYCOMB LOUVRE</b>	0 - non presente / not present 1 - presente / present
<b>COLORE LED LED COLOUR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE OPTICS</b>	S - 13° M - 22° L - 33°

**FLUSSO SORGENTE  
LUMEN OUTPUT AT SOURCE** 168 lm (3000K, CRI 80)


**FLUSSO EMESSO  
DELIVERED LUMEN OUTPUT** 146 lm (3000K, 22°, CRI 80)

**NUMERO E TIPO LED  
NO. AND TYPE OF LED** 1 power LED  
1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

**MATERIALE  
MATERIAL** corpo in alluminio pressofuso,  
schermo in vetro extrachiaro  
temprato trasparente e serigrafato nero /  
body in die-cast aluminium,  
screen in black-serigraphed, tempered,  
transparent extra-clear glass

**ALIMENTATORE  
POWER SUPPLY UNIT** non incluso  
not included

## INTONO 1.2



6W 24Vdc

### CODICE CODE

NT1200 00 0 E Bianco / White  
 NT1200 00 0 F Grigio / Grey  
 NT1200 00 0 H Antracite / Anthracite  
 NT1200 00 0 T Cor-ten  
 NT1200 00 0 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>NIDO D'APE HONEYCOMB LOUVRE</b>	0 - non presente / not present 1 - presente / present
<b>COLORE LED LED COLOUR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE OPTICS</b>	SS - 13°+13° MM - 22°+22° LL - 33°+33° SL - 13°+33°


**FLUSSO SORGENTE  
LUMEN OUTPUT AT SOURCE** 168 lm (3000K, CRI 80)  
per emissione/per beam

**FLUSSO EMESSO  
DELIVERED LUMEN OUTPUT** 146 lm (3000K, 22°, CRI 80)  
per emissione/per beam

**NUMERO E TIPO LED  
NO. AND TYPE OF LED** 2 power LEDs  
1/4 ANSI BIN, 50000h L90 B10 (Ta 25°C)

**MATERIALE  
MATERIAL** corpo in alluminio pressofuso,  
schermo in vetro extrachiaro  
temprato trasparente e serigrafato nero /  
body in die-cast aluminium,  
screen in black-serigraphed, tempered,  
transparent extra-clear glass

**ALIMENTATORE  
POWER SUPPLY UNIT** non incluso  
not included

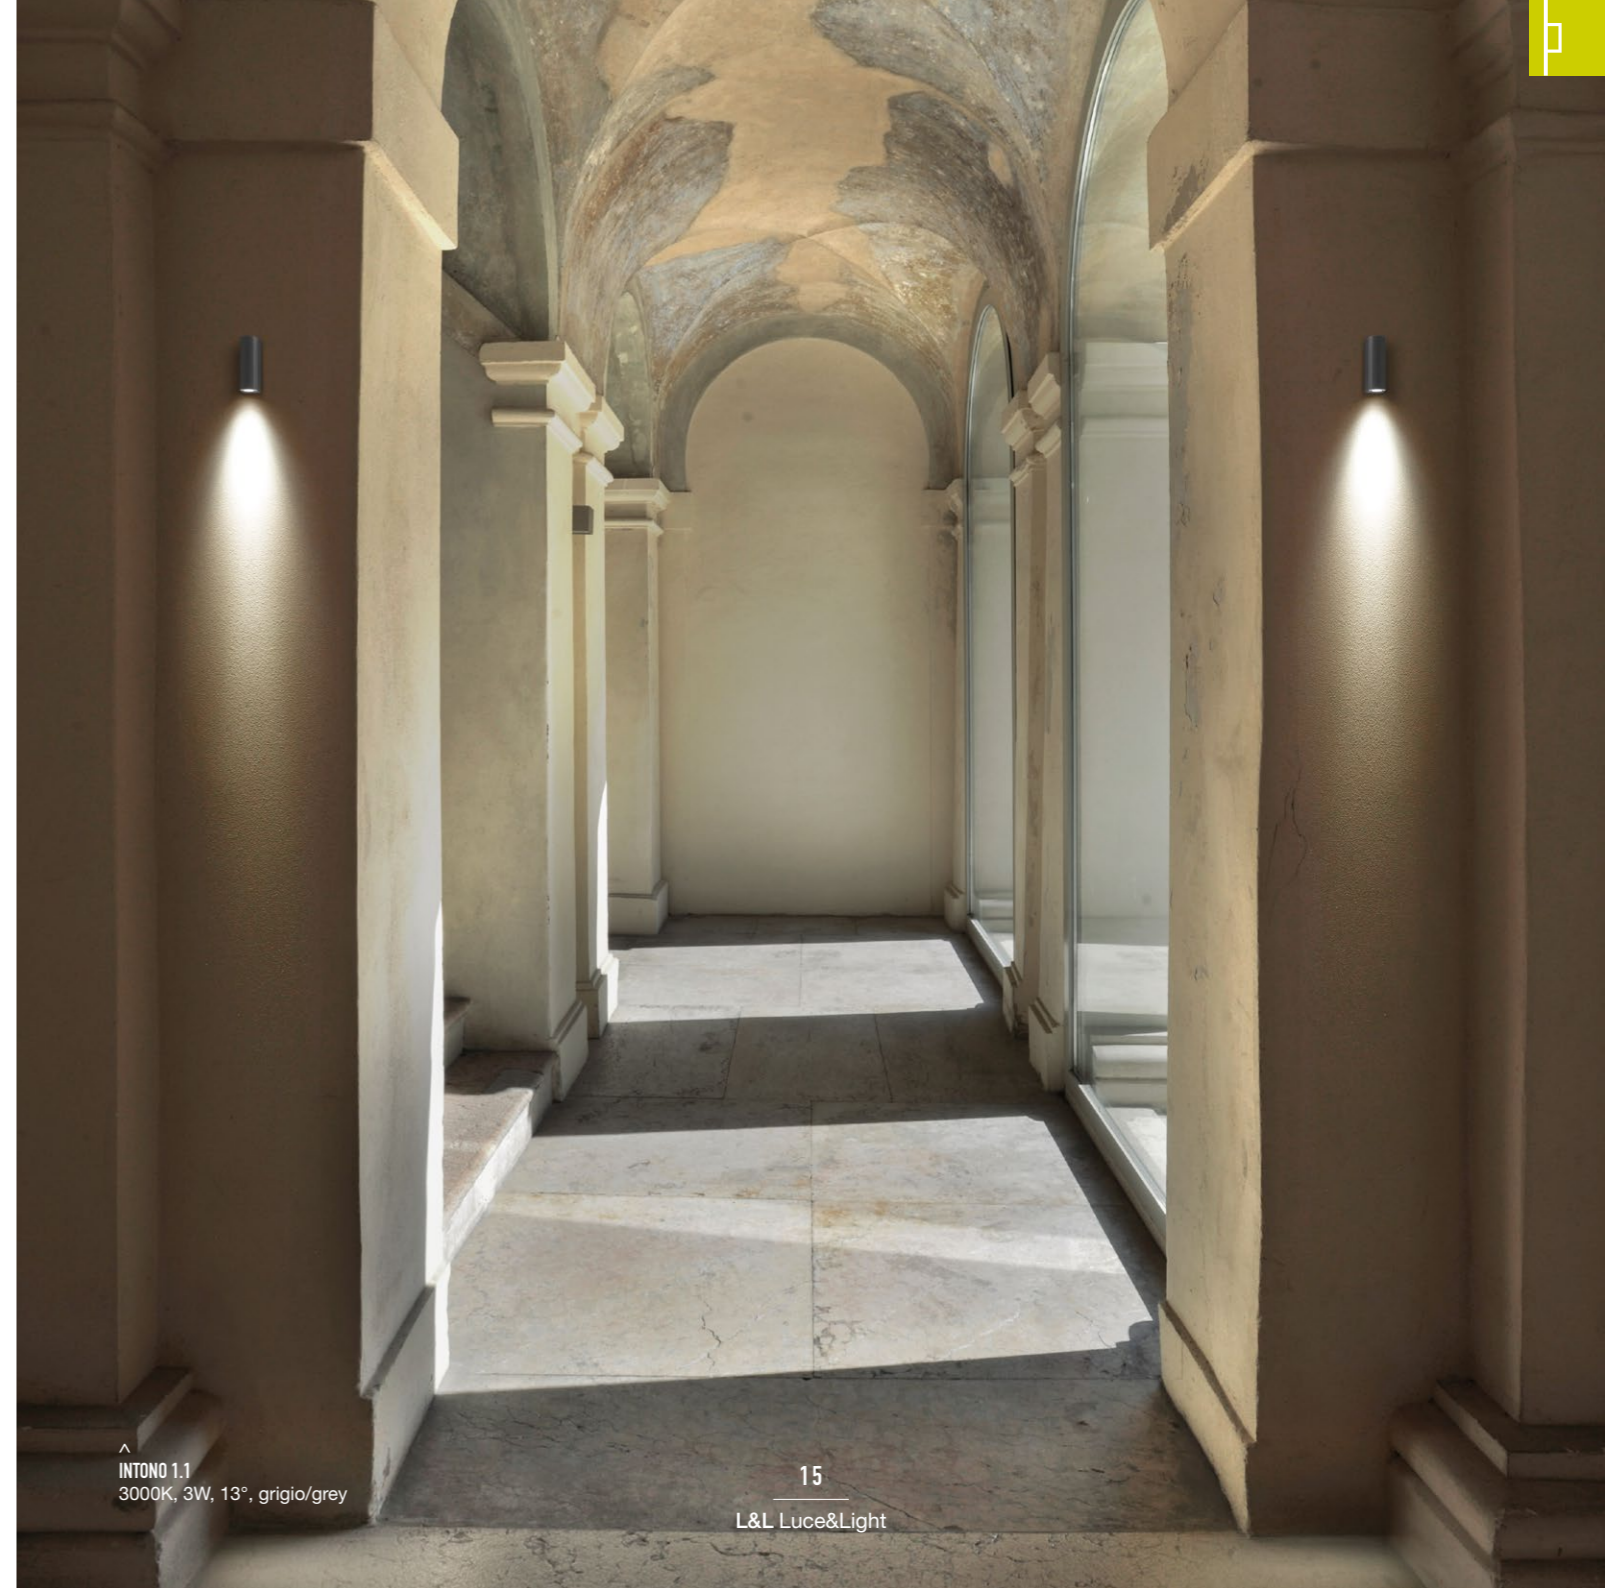


INTONO 1.1  
3000K, 3W, 13°, grigio/grey



^  
INTONO 3.1  
4000K, 10W, 15°, grigio/grey

## INTONO 2.1



### POTENZA / ALIMENTAZIONE POWER / POWER SUPPLY


6W 230Vac

### CODICE CODE

NT2110 00 0 E Bianco / White  
 NT2110 00 0 F Grigio / Grey  
 NT2110 00 0 H Antracite / Anthracite  
 NT2110 00 0 T Cor-ten  
 NT2110 00 0 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>NIDO D'APE HONEYCOMB LOUVRE</b>	0 - non presente / not present 1 - presente / present
<b>COLORE LED LED COLOUR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE OPTICS</b>	Z - asimmetrica/asymmetrical 8° T - 11° M - 34° K - 68° D - diffusa/diffuse
<b>FLUSSO SORGENTE LUMEN OUTPUT AT SOURCE</b>	488 lm (3000K, CRI 80)
<b>FLUSSO EMESSO DELIVERED LUMEN OUTPUT</b>	352 lm (3000K, 34°, CRI 80)
<b>NUMERO E TIPO LED NO. AND TYPE OF LED</b>	1 power LED 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
<b>MATERIALE MATERIAL</b>	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
<b>ALIMENTATORE POWER SUPPLY UNIT</b>	integrato built in

## INTONO 2.2



12W 230Vac

NT2210 00 0 E Bianco / White  
 NT2210 00 0 F Grigio / Grey  
 NT2210 00 0 H Antracite / Anthracite  
 NT2210 00 0 T Cor-ten  
 NT2210 00 0 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>NIDO D'APE HONEYCOMB LOUVRE</b>	0 - non presente / not present 1 - presente / present
<b>COLORE LED LED COLOUR</b>	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE OPTICS</b>	TT - 11°+ 11° TK - 11°+ 68° MM - 34°+ 34° KK - 68°+ 68° DD - diffusa/diffuse + diffusa/diffuse ZK - asimmetrica/asymmetrical 8°+ 68°
<b>FLUSSO SORGENTE LUMEN OUTPUT AT SOURCE</b>	488 lm (3000K, CRI 80) per emissione/per beam
<b>FLUSSO EMESSO DELIVERED LUMEN OUTPUT</b>	352 lm (3000K, 34°, CRI 80) per emissione/per beam
<b>NUMERO E TIPO LED NO. AND TYPE OF LED</b>	2 power LEDs 3-step MacAdam, 50000h L90 B10 (Ta 25°C)
<b>MATERIALE MATERIAL</b>	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
<b>ALIMENTATORE POWER SUPPLY UNIT</b>	integrato built in




^  
INTONO 3.9

cassa audio / speaker: 3W  
 potenza massima / maximum power  
 impedenza nominale Z / nominal impedance Z 16 Ohm  
 livello medio di pressione sonora / mean sound pressure level 86 dB (1W/1m)

**WUNT39A00**  
 Kit controller audio bluetooth 3.0 con alimentatore e amplificatore (per sistema controllo vocale Alexa o Google)

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)

INTONO 3.1



CE LED TECH 240 121 80 kg 2.20 IP65 IK04  
 A A+ A++

<b>POTENZA / ALIMENTAZIONE</b> POWER / POWER SUPPLY	10W 230Vac
<b>CODICE</b> CODE	<b>NT3110</b> 0 0 0 0 E Bianco / White <b>NT3110</b> 0 0 0 0 F Grigio / Grey <b>NT3110</b> 0 0 0 0 H Antracite / Anthracite <b>NT3110</b> 0 0 0 0 T Cor-ten <b>NT3110</b> 0 0 0 0 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>GESTIONE DI CONTROLLO</b> CONTROL SYSTEM	0 - on/off R - 1-10V versione DALI disponibile su richiesta / DALI version on request
<b>NIDO D'APE</b> HONEYCOMB LOUVRE	0 - non presente / not present 1 - presente / present
<b>COLORE LED</b> LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE</b> OPTICS	Z - asimmetrica/asymmetrical 11° S - 15° M - 20° L - 43° W - wall grazing A - asimmetrica/asymmetrical

<b>FLUSSO SORGENTE</b> LUMEN OUTPUT AT SOURCE	988 lm (3000K, CRI 80)
--	------------------------


<b>FLUSSO EMESSO</b> DELIVERED LUMEN OUTPUT	837 lm (3000K, 15°, CRI 80)
--	-----------------------------

<b>NUMERO E TIPO LED</b> NO. AND TYPE OF LED	1 COB LED High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
---	--

<b>MATERIALE</b> MATERIAL	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
------------------------------	--

<b>ALIMENTATORE</b> POWER SUPPLY UNIT	integrato built in
--	-----------------------

INTONO 3.2



CE LED TECH 240 121 80 kg 2.20 IP65 IK04  
 A A+ A++

<b>POTENZA / ALIMENTAZIONE</b> POWER / POWER SUPPLY	20W 230Vac
<b>CODICE</b> CODE	<b>NT3210</b> 0 0 0 0 E Bianco / White <b>NT3210</b> 0 0 0 0 F Grigio / Grey <b>NT3210</b> 0 0 0 0 H Antracite / Anthracite <b>NT3210</b> 0 0 0 0 T Cor-ten <b>NT3210</b> 0 0 0 0 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>GESTIONE DI CONTROLLO</b> CONTROL SYSTEM	0 - on/off R - 1-10V versione DALI disponibile su richiesta / DALI version on request
<b>NIDO D'APE</b> HONEYCOMB LOUVRE	0 - non presente / not present 1 - presente / present
<b>COLORE LED</b> LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE</b> OPTICS	SS - 15°+ 15° MM - 20°+ 20° LL - 43°+ 43° SL - 15°+ 43° WW - wall grazing + wall grazing WA - wall grazing + asimmetrica/asymmetrical ZW - asimmetrica/asymmetrical 11°+ wall grazing

<b>FLUSSO SORGENTE</b> LUMEN OUTPUT AT SOURCE	988 lm (3000K, CRI 80) per emissione/per beam
--	--


<b>FLUSSO EMESSO</b> DELIVERED LUMEN OUTPUT	837 lm (3000K, 15°, CRI 80) per emissione/per beam
--	---

<b>NUMERO E TIPO LED</b> NO. AND TYPE OF LED	2 COB LEDs High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
---	---

<b>MATERIALE</b> MATERIAL	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
------------------------------	--

<b>ALIMENTATORE</b> POWER SUPPLY UNIT	integrato built in
--	-----------------------

INTONO 3.9



CE LED TECH 240 121 80 kg 2.24 IP65 IK04  
 A A+ A++

<b>POTENZA / ALIMENTAZIONE</b> POWER / POWER SUPPLY	9W 24Vdc
<b>CODICE</b> CODE	<b>NT3900</b> 00 0 0 9 E Bianco / White <b>NT3900</b> 00 0 0 9 F Grigio / Grey <b>NT3900</b> 00 0 0 9 H Antracite / Anthracite <b>NT3900</b> 00 0 0 9 T Cor-ten <b>NT3900</b> 00 0 0 9 7 Primer

<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>GESTIONE DI CONTROLLO</b> CONTROL SYSTEM	0 - non presente / not present 1 - presente / present
<b>NIDO D'APE</b> HONEYCOMB LOUVRE	0 - non presente / not present 1 - presente / present
<b>COLORE LED</b> LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE</b> OPTICS	Z - asimmetrica/asymmetrical 11° S - 15° M - 20° L - 43° W - wall grazing A - asimmetrica/asymmetrical

<b>FLUSSO SORGENTE</b> LUMEN OUTPUT AT SOURCE	988 lm (3000K, CRI 80)
--	------------------------

<b>FLUSSO EMESSO</b> DELIVERED LUMEN OUTPUT	837 lm (3000K, 15°, CRI 80)
--	-----------------------------

<b>NUMERO E TIPO LED</b> NO. AND TYPE OF LED	1 COB LED High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
---	--

<b>MATERIALE</b> MATERIAL	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
------------------------------	--

<b>ALIMENTATORE</b> POWER SUPPLY UNIT	non incluso not included
--	-----------------------------



#### INTONO 4.9

cassa audio / speaker: 3W  
 potenza massima / maximum power  
 impedenza nominale Z / nominal impedance Z 8 Ohm  
 livello medio di pressione sonora / mean sound pressure level 86 dB (1W/1m)

**WUNT39A00**  
 Kit controller audio bluetooth 3.0 con alimentatore e amplificatore (per sistema controllo vocale Alexa o Google)

Bluetooth 3.0 audio control kit with power supply unit and amplifier (for Alexa or Google voice-control systems)

#### INTONO 4.1



<b>POTENZA / ALIMENTAZIONE</b> POWER / POWER SUPPLY	19W 230Vac
<b>CODICE</b> CODE	<b>NT4110</b> <b>E</b> Bianco / White <b>NT4110</b> <b>F</b> Grigio / Grey <b>NT4110</b> <b>H</b> Antracite / Anthracite <b>NT4110</b> <b>T</b> Cor-ten <b>NT4110</b> <b>7</b> Primer
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>GESTIONE DI CONTROLLO</b> CONTROL SYSTEM	0 - on/off R - 1-10V versione DALI disponibile su richiesta / DALI version on request
<b>NIDO D'APE</b> HONEYCOMB LOUVRE	0 - non presente / not present 1 - presente / present
<b>COLORE LED</b> LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE</b> OPTICS	Z - asimmetrica/asymmetrical 28° S - 12° M - 23° L - 57° W - wall grazing A - asimmetrica/asymmetrical
<b>FLUSSO SORGENTE</b> LUMEN OUTPUT AT SOURCE	1646 lm (3000K, CRI 80)
<b>FLUSSO EMESSE</b> DELIVERED LUMEN OUTPUT	1386 lm (3000K, 12°, CRI 80)
<b>NUMERO E TIPO LED</b> NO. AND TYPE OF LED	1 COB LED High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
<b>MATERIALE</b> MATERIAL	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
<b>ALIMENTATORE</b> POWER SUPPLY UNIT	integrato built in

#### INTONO 4.2



<b>POTENZA / ALIMENTAZIONE</b> POWER / POWER SUPPLY	38W 230Vac
<b>CODICE</b> CODE	<b>NT4210</b> <b>E</b> Bianco / White <b>NT4210</b> <b>F</b> Grigio / Grey <b>NT4210</b> <b>H</b> Antracite / Anthracite <b>NT4210</b> <b>T</b> Cor-ten <b>NT4210</b> <b>7</b> Primer
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>GESTIONE DI CONTROLLO</b> CONTROL SYSTEM	0 - on/off R - 1-10V versione DALI disponibile su richiesta / DALI version on request
<b>NIDO D'APE</b> HONEYCOMB LOUVRE	0 - non presente / not present 1 - presente / present
<b>COLORE LED</b> LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE</b> OPTICS	SS - 12°+ 12° MM - 23°+ 23° LL - 57°+ 57° SL - 12°+ 57° WW - wall grazing + wall grazing WA - wall grazing + asimmetrica/asymmetrical ZL - asimmetrica/asymmetrical 28°+ 57°
<b>FLUSSO SORGENTE</b> LUMEN OUTPUT AT SOURCE	1646 lm (3000K, CRI 80) per emissione/per beam
<b>FLUSSO EMESSE</b> DELIVERED LUMEN OUTPUT	1386 lm (3000K, 12°, CRI 80) per emissione/per beam
<b>NUMERO E TIPO LED</b> NO. AND TYPE OF LED	2 COB LEDs High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
<b>MATERIALE</b> MATERIAL	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
<b>ALIMENTATORE</b> POWER SUPPLY UNIT	integrato built in

#### INTONO 4.9




<b>POTENZA / ALIMENTAZIONE</b> POWER / POWER SUPPLY	17W 24Vdc
<b>CODICE</b> CODE	<b>NT4900</b> <b>9 E</b> Bianco / White <b>NT4900</b> <b>9 F</b> Grigio / Grey <b>NT4900</b> <b>9 H</b> Antracite / Anthracite <b>NT4900</b> <b>9 T</b> Cor-ten <b>NT4900</b> <b>9 7</b> Primer
<b>CRI</b>	0 - CRI 80 1 - CRI >90
<b>GESTIONE DI CONTROLLO</b> CONTROL SYSTEM	0 - non presente / not present 1 - presente / present
<b>NIDO D'APE</b> HONEYCOMB LOUVRE	0 - non presente / not present 1 - presente / present
<b>COLORE LED</b> LED COLOUR	F - 2700K 5 - 3000K 9 - 4000K
<b>OTTICHE</b> OPTICS	Z - asimmetrica/asymmetrical 28° S - 12° M - 23° L - 57° W - wall grazing A - asimmetrica/asymmetrical
<b>FLUSSO SORGENTE</b> LUMEN OUTPUT AT SOURCE	1646 lm (3000K, CRI 80)
<b>FLUSSO EMESSE</b> DELIVERED LUMEN OUTPUT	1386 lm (3000K, 12°, CRI 80)
<b>NUMERO E TIPO LED</b> NO. AND TYPE OF LED	1 COB LED High Density 2-step MacAdam, 50000h L95 B10 (Ta 25°C)
<b>MATERIALE</b> MATERIAL	corpo in alluminio pressofuso, schermo in vetro extrachiaro temprato trasparente e serigrafato nero / body in die-cast aluminium, screen in black-serigraphed, tempered, transparent extra-clear glass
<b>ALIMENTATORE</b> POWER SUPPLY UNIT	non incluso not included

# INTONO


## DATI FOTOMETRICI / PHOTOMETRIC DATA

### INTONO 1.1


S - 13° CRI 80

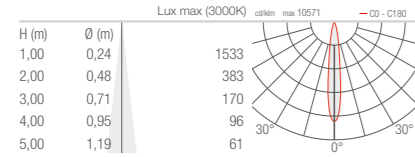

M - 22° CRI 80

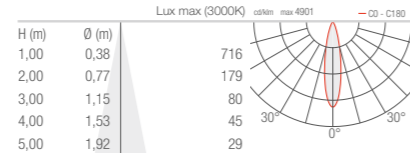


L - 33° CRI 80

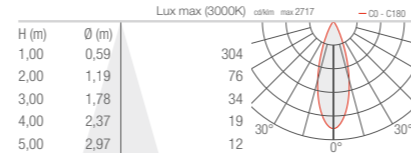


### INTONO 2.1


Z - Asimmetrico / Asymmetrical 8° CRI 80

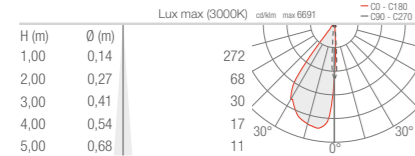


T - 11° CRI 80

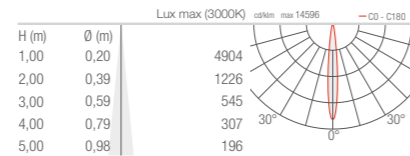


M - 34° CRI 80

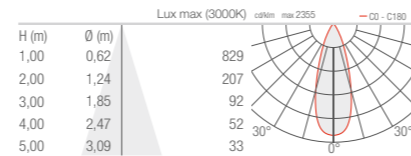

K - 68° CRI 80

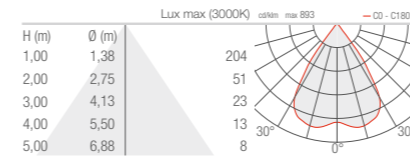


D - Diffuso / Diffuse CRI 80

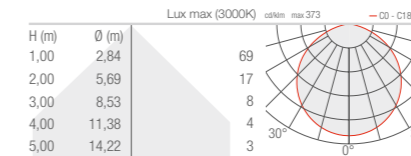


### INTONO 3.1


Z - Asimmetrico / Asymmetrical 11° CRI 80

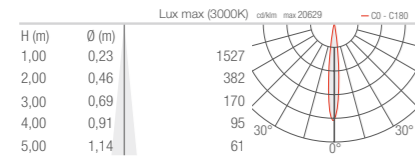


S - 15° CRI 80

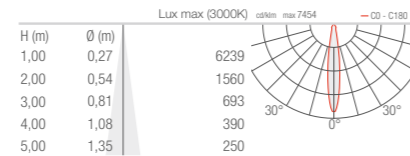


M - 20° CRI 80

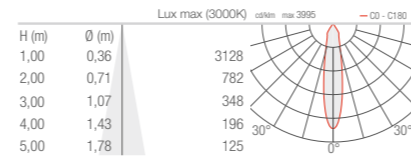


L - 43° CRI 80

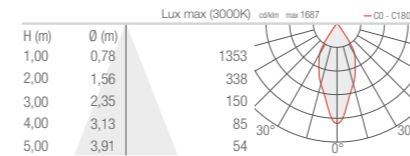

W - Wall grazing CRI 80

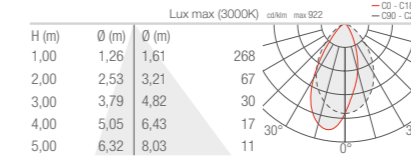


A - Asimmetrico / Asymmetrical CRI 80

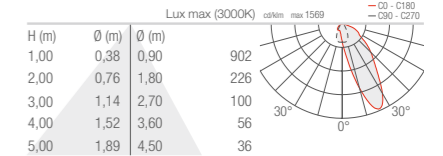


### INTONO 4.1


Z - Asimmetrico / Asymmetrical 28° CRI 80

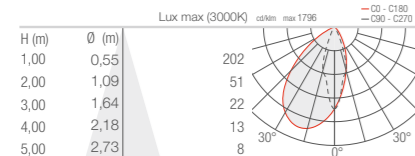


S - 12° CRI 80

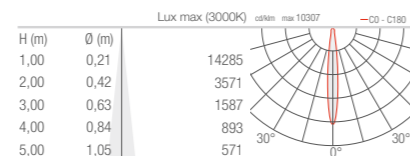


M - 23° CRI 80

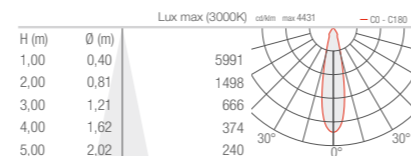


L - 57° CRI 80

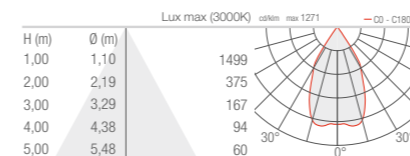

W - Wall grazing CRI 80

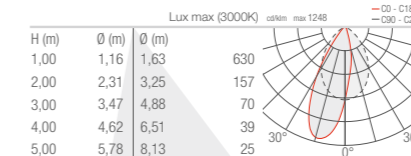

A - Asimmetrico / Asymmetrical CRI 80

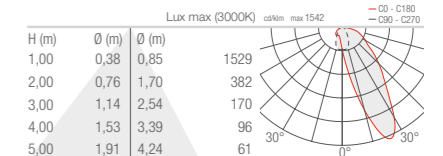




^  
INTONO 2.2  
Riflessioni Intono, Milano Design Week 2019

CONCEPT AND ART DIRECTION  
valentinicesarottiassociati

© L&L LUCE&LIGHT SRL, 2019  
ALL RIGHTS RESERVED

REV01/2019



**L&L Luce&Light**  
**Via Trescalini 5**  
**36031 Dueville**  
**Vicenza - Italy**

**T +39 0444 36 05 71**  
**E [lucelight@lucelight.it](mailto:lucelight@lucelight.it)**  
**W [www.lucelight.it](http://www.lucelight.it)**